




FL II Composite Performance Curve: Models 15–75

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.



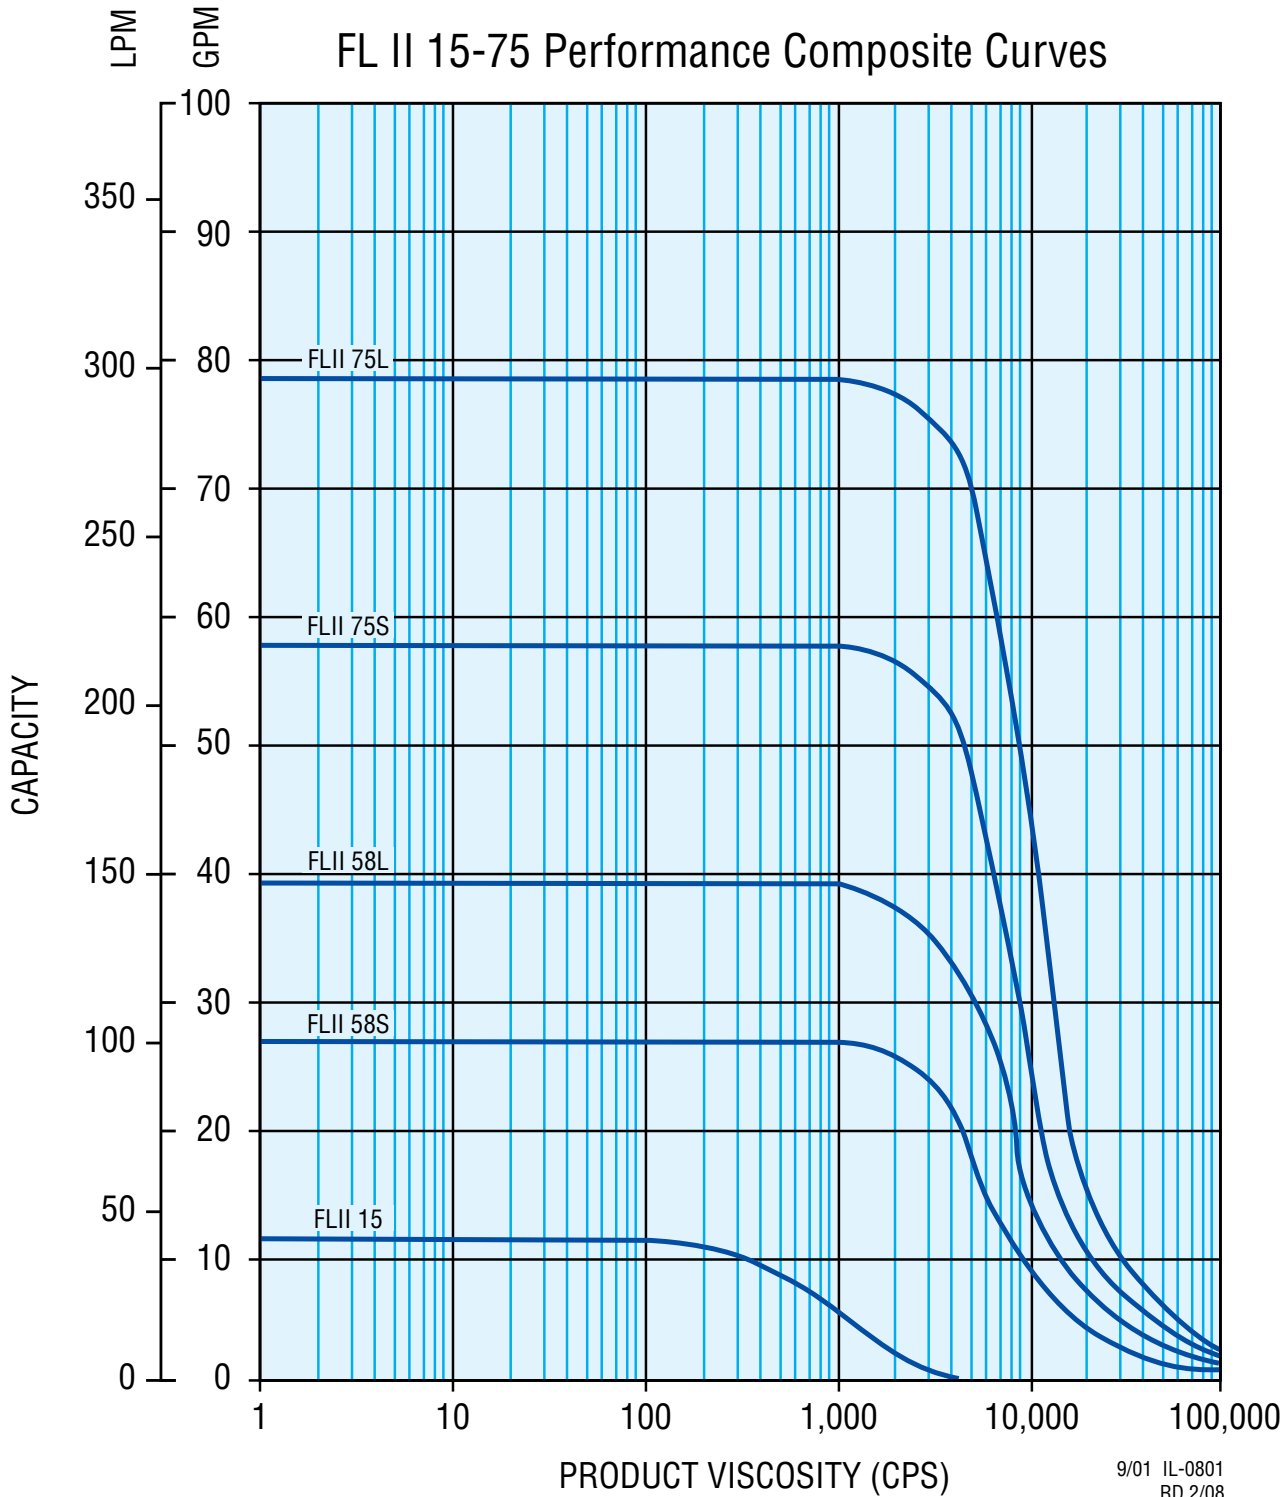

FL II Composite Performance Curve: Models 100–130

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

