




FZX Performance Curves @ 50 Hz
Models: All (Composite)
 (1 cps, 70°F, 0 psig inlet pressure)

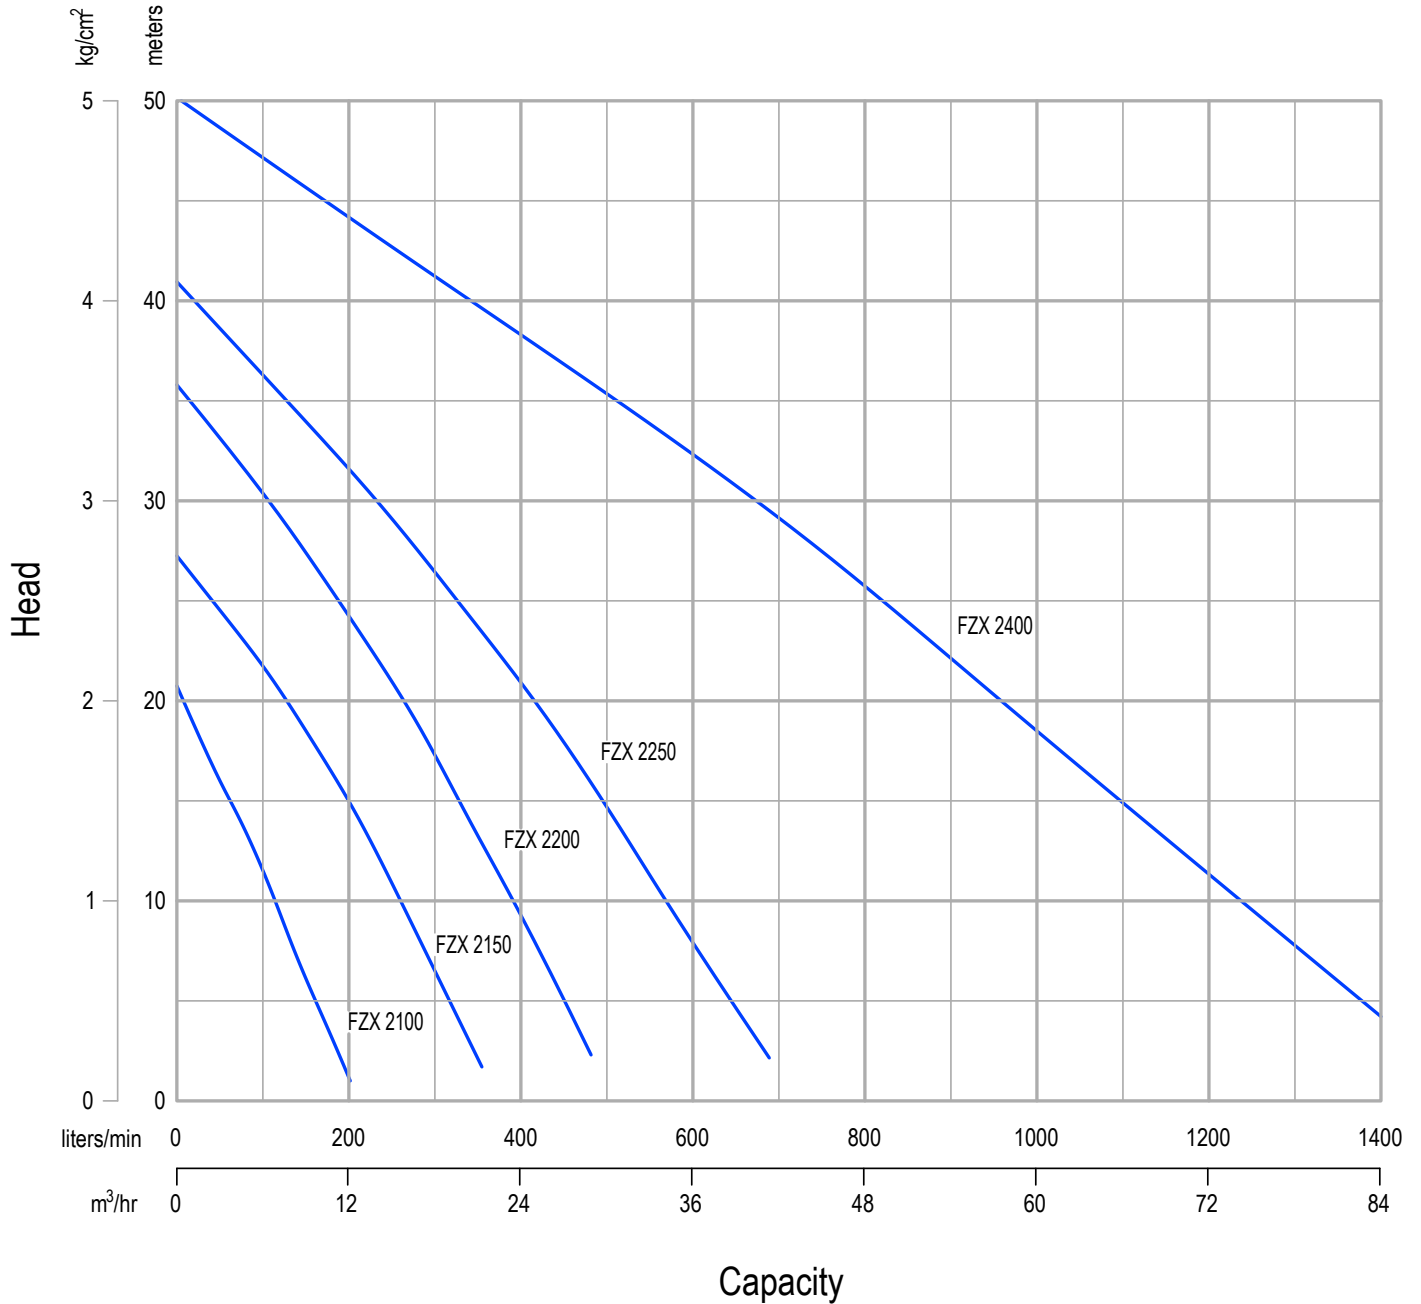

5/23/02
 1265000028

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FPR Performance Curves @ 50 Hz
Model: 2100 (Inlet 2", Outlet 2")
(1 cps, 70°F, 0 psig inlet pressure)

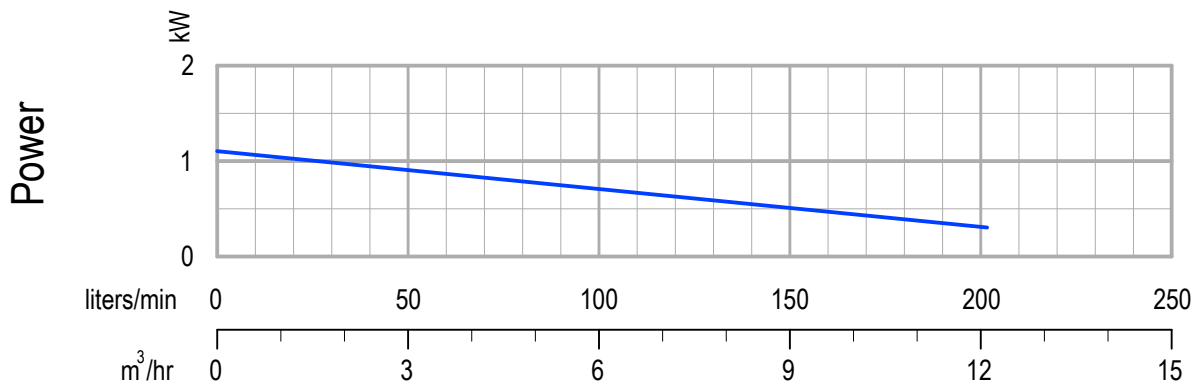
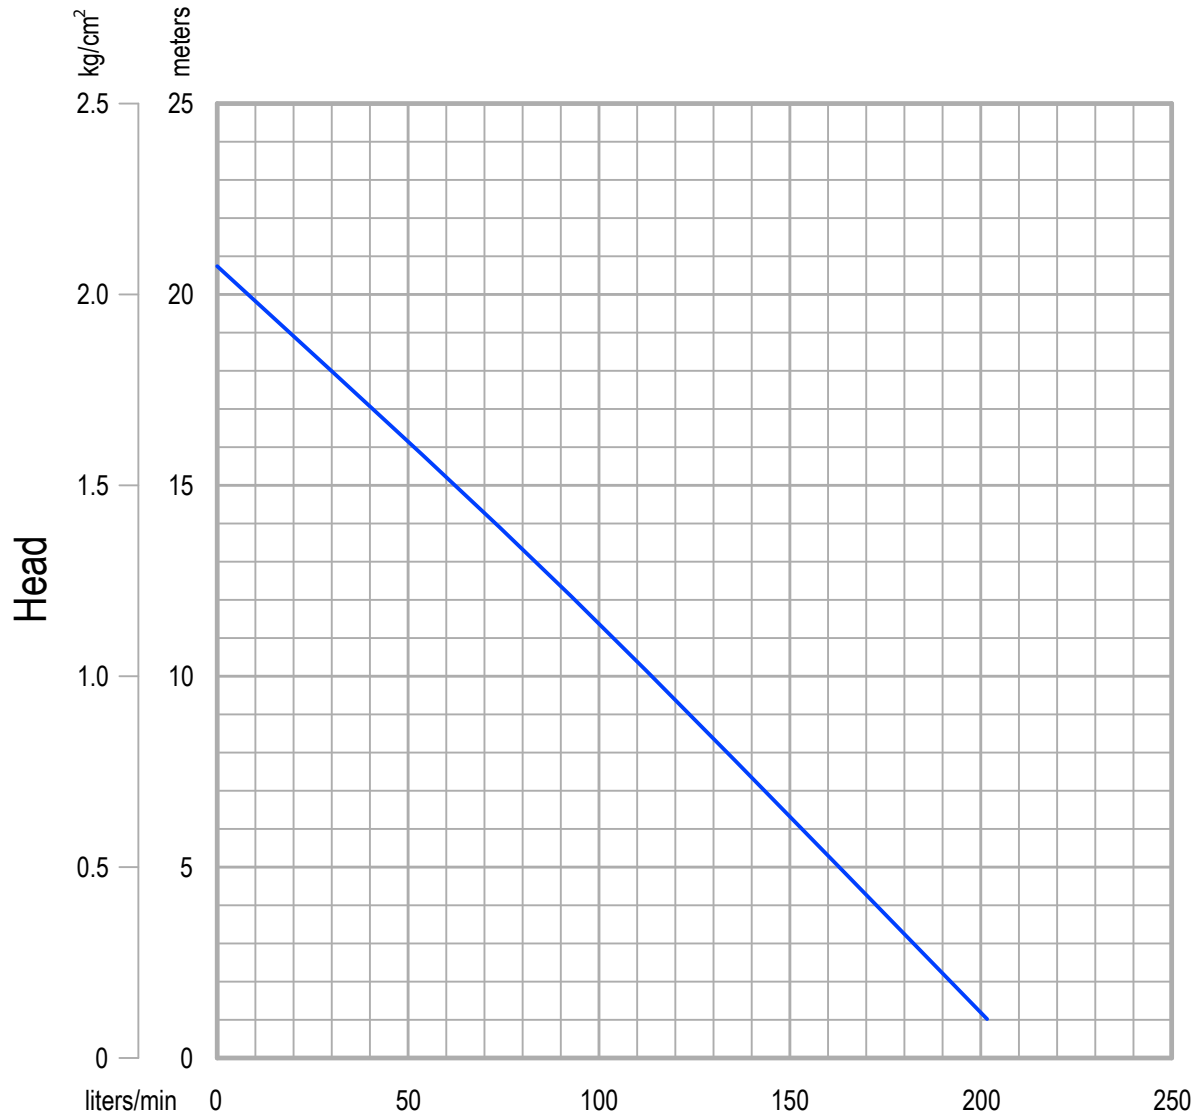


Capacity

11/13/2000 IL-0745

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.



FPR Performance Curves @ 50 Hz
Model: 2150 (Inlet 2", Outlet 2")
 (1 cps, 70°F, 0 psig inlet pressure)

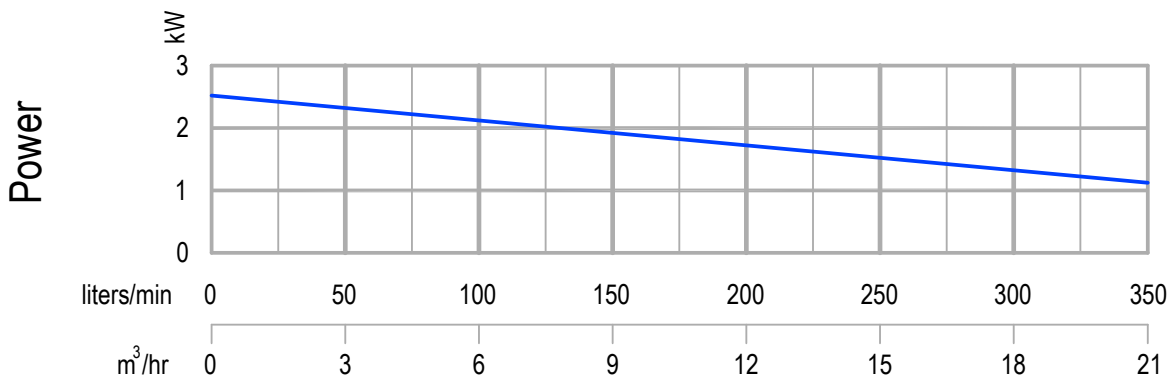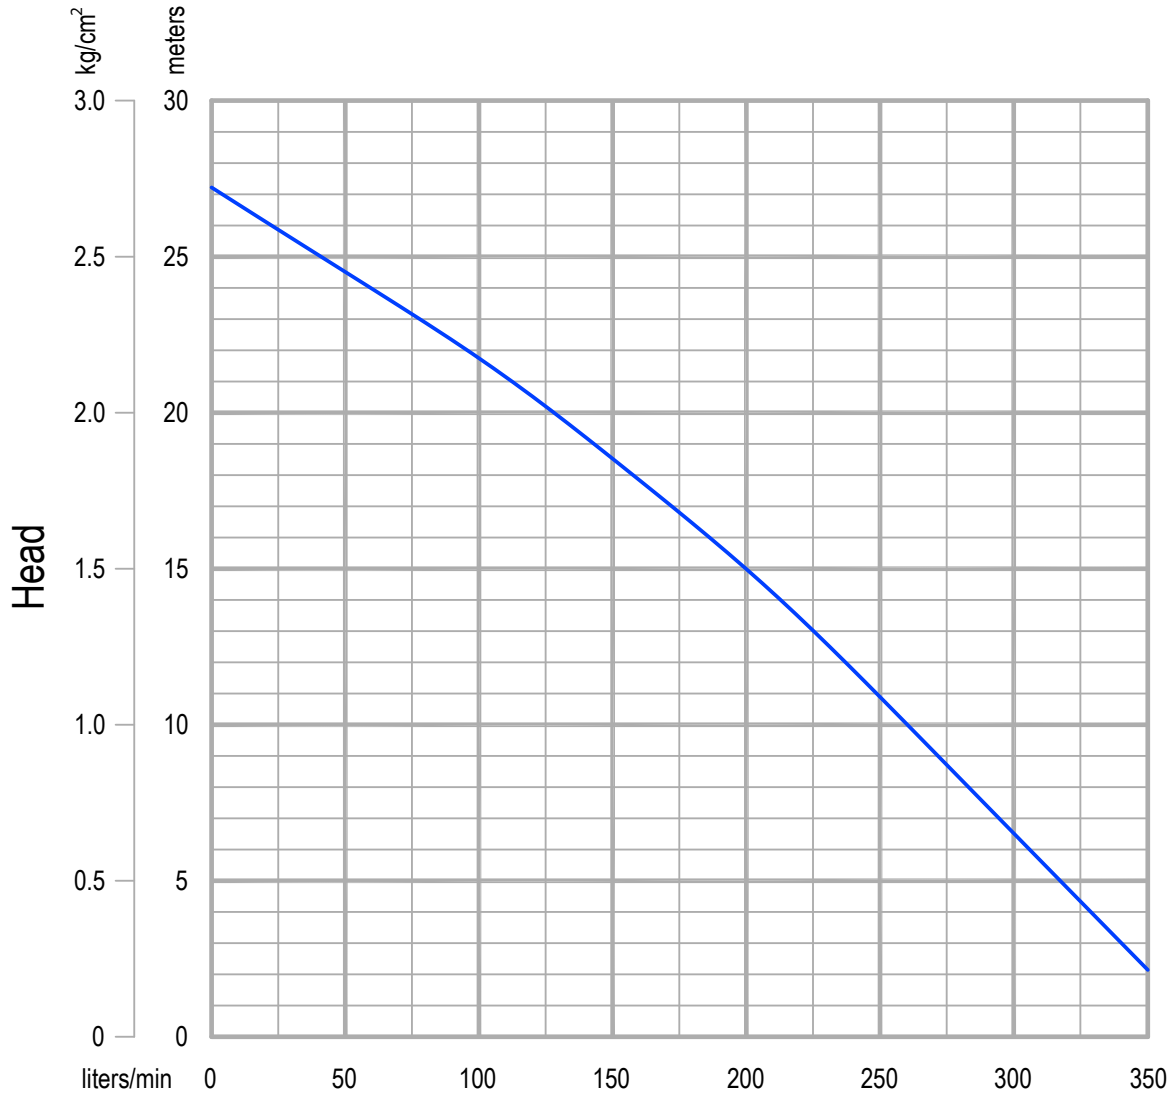

Capacity 11/13/2000 IL-0748

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FPR Performance Curves @ 50 Hz
Model: 2200 (Inlet 2", Outlet 2")
(1 cps, 70°F, 0 psig inlet pressure)

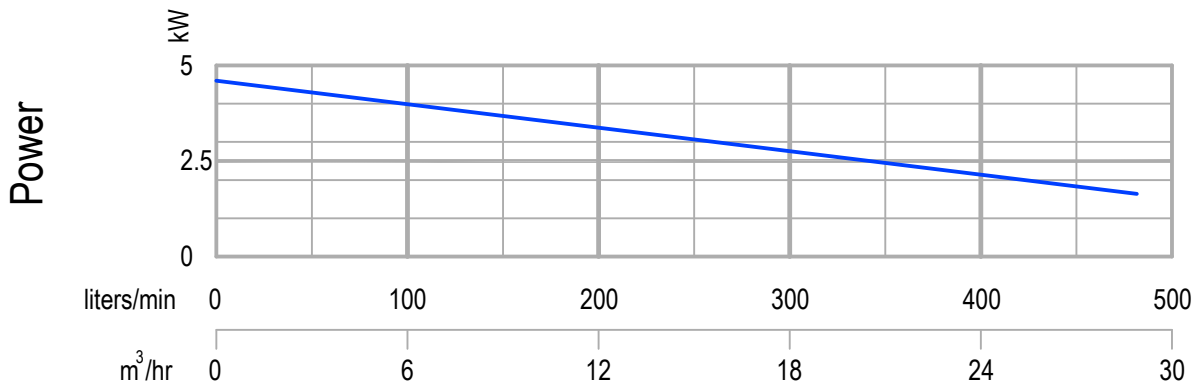
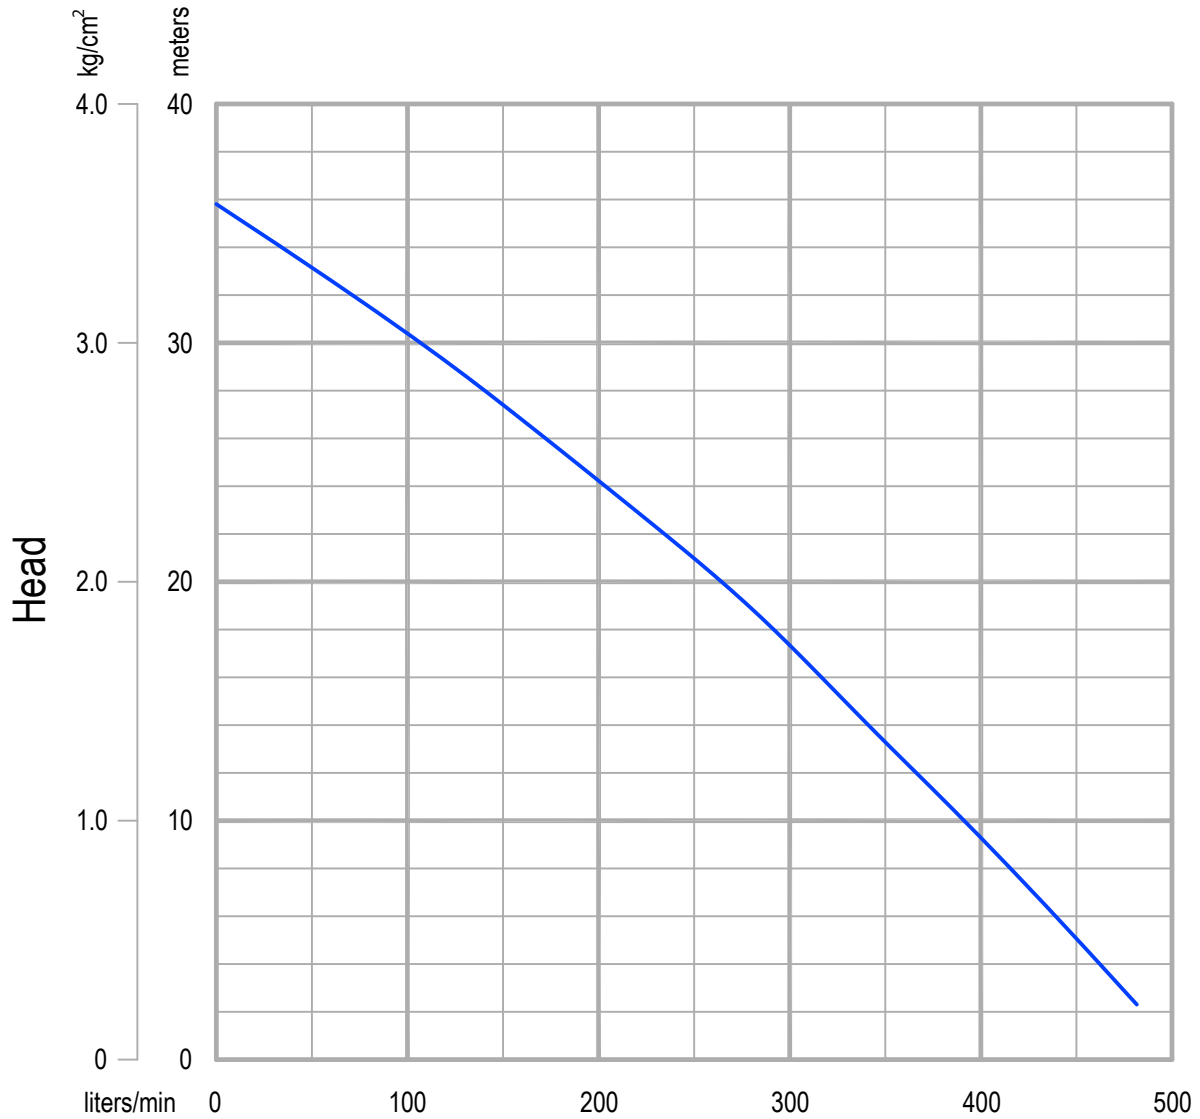


Capacity

11/13/2000 IL-0749

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FPR Performance Curves @ 50 Hz
Model: 2250 (Inlet 2.5", Outlet 2.5")
 (1 cps, 70°F, 0 psig inlet pressure)

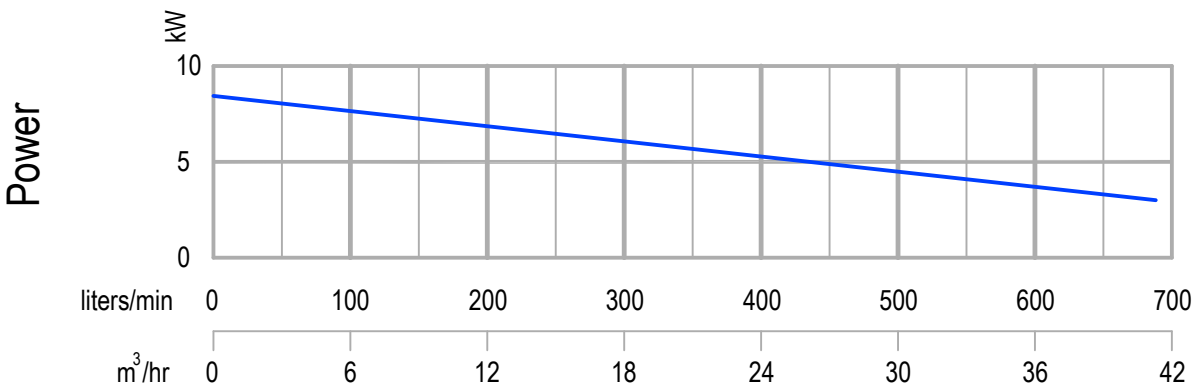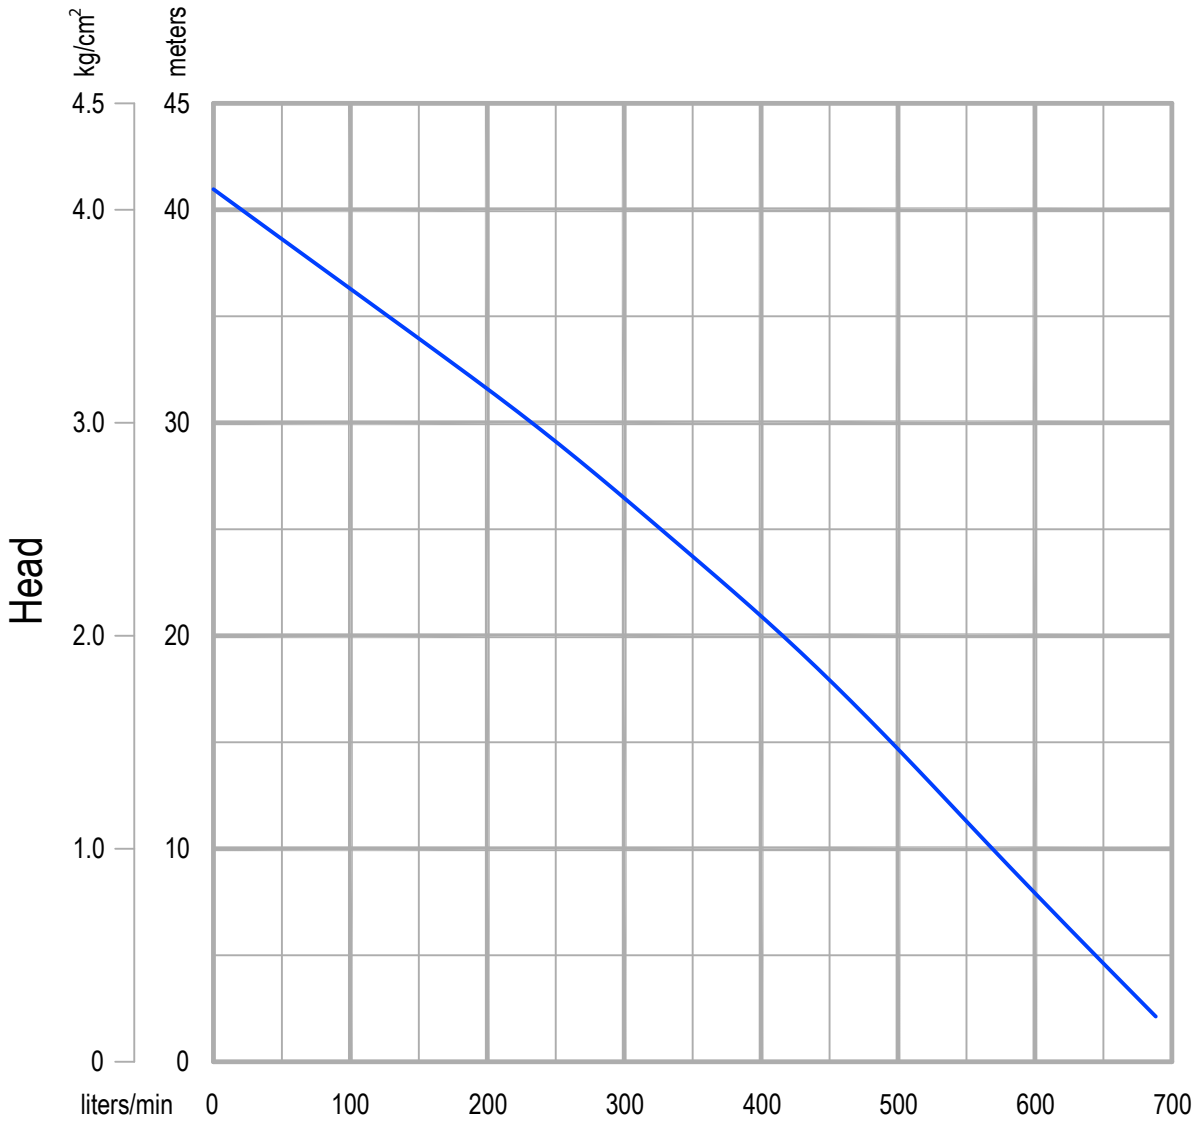


Capacity
 m³/hr 0 6 12 18 24 30 36 42

11/13/2000 IL-0750

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

FZX Performance Curves @ 50 Hz
Model: 2400 (Inlet 3", Outlet 3")
(1 cps, 70°F, 0 psig inlet pressure)

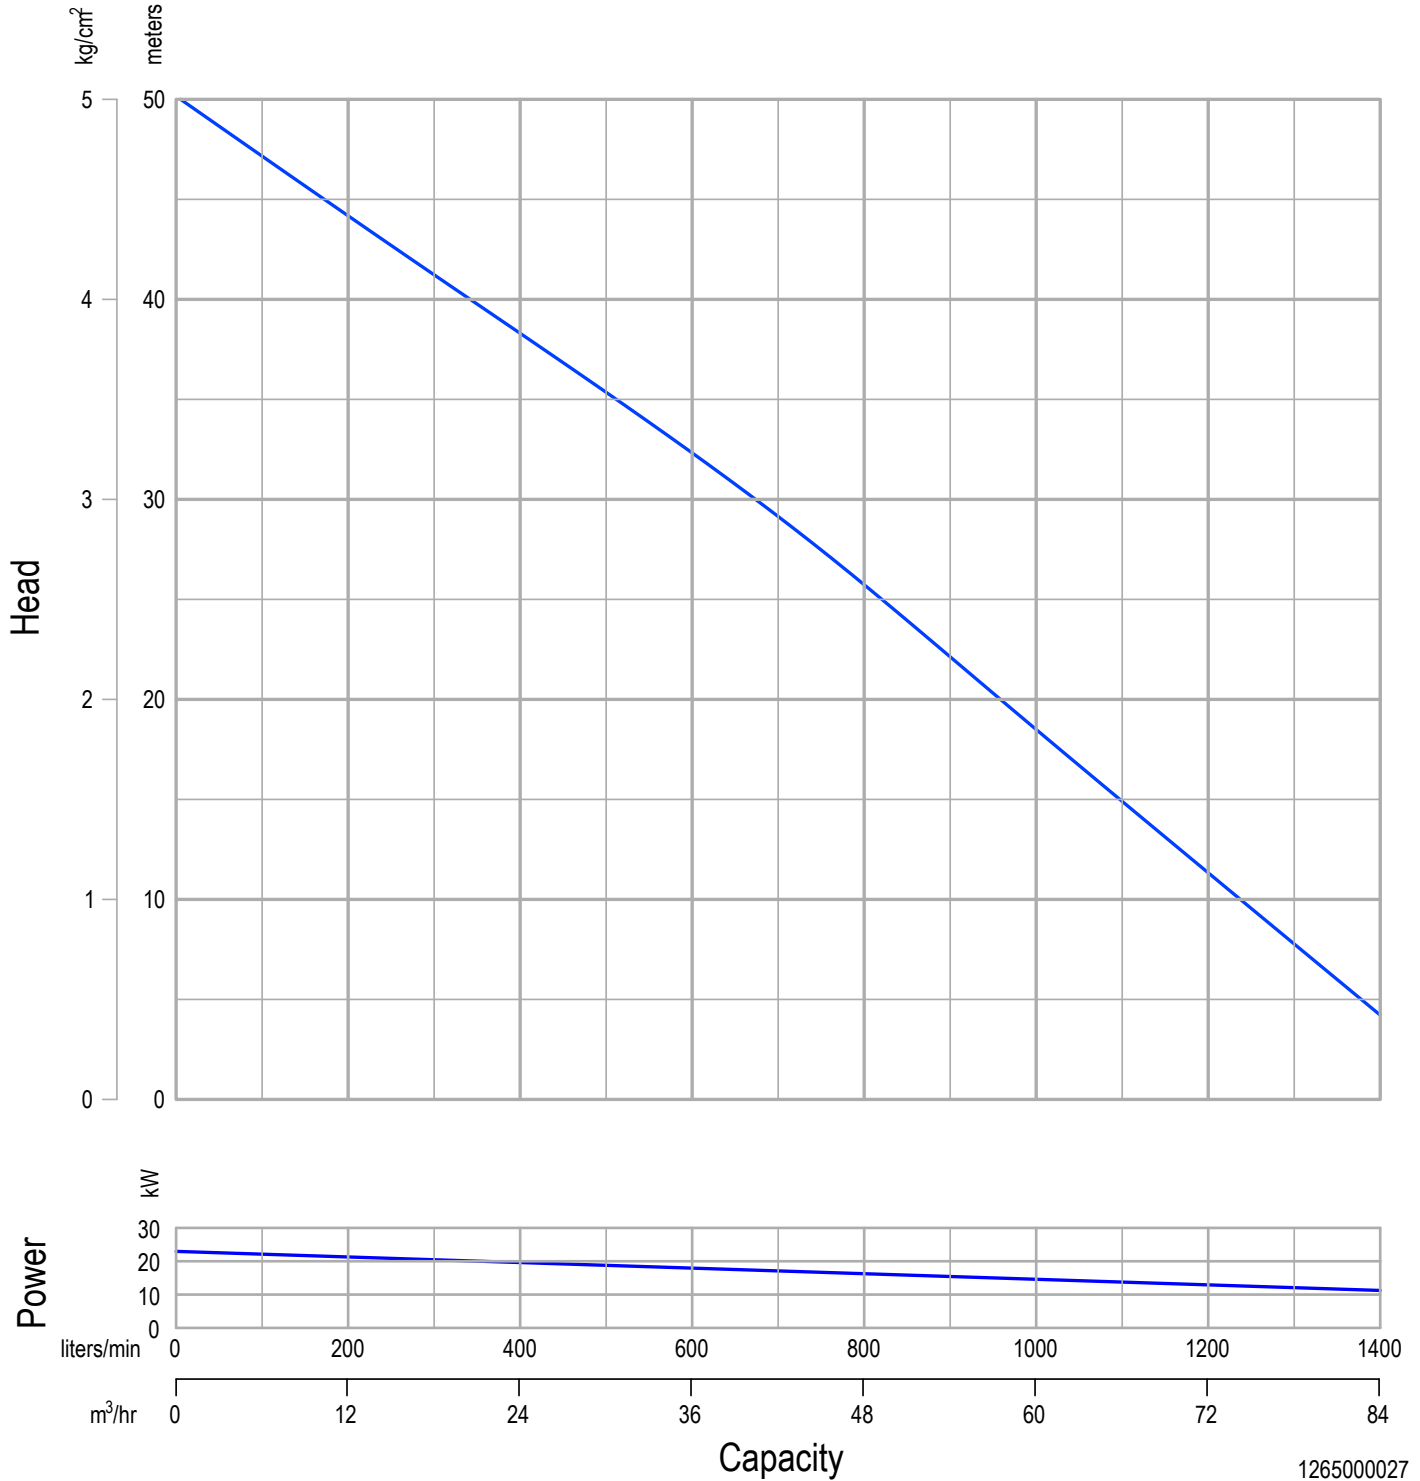

1265000027
 5/28/02

Performance curve based on tests using 70°F water and 0 psig inlet pressure. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.