




FP/FPX Composite Performance Curve: Models 701–3541

1750 RPM (60 Hz)

Performance curve based on tests using 70°F water. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

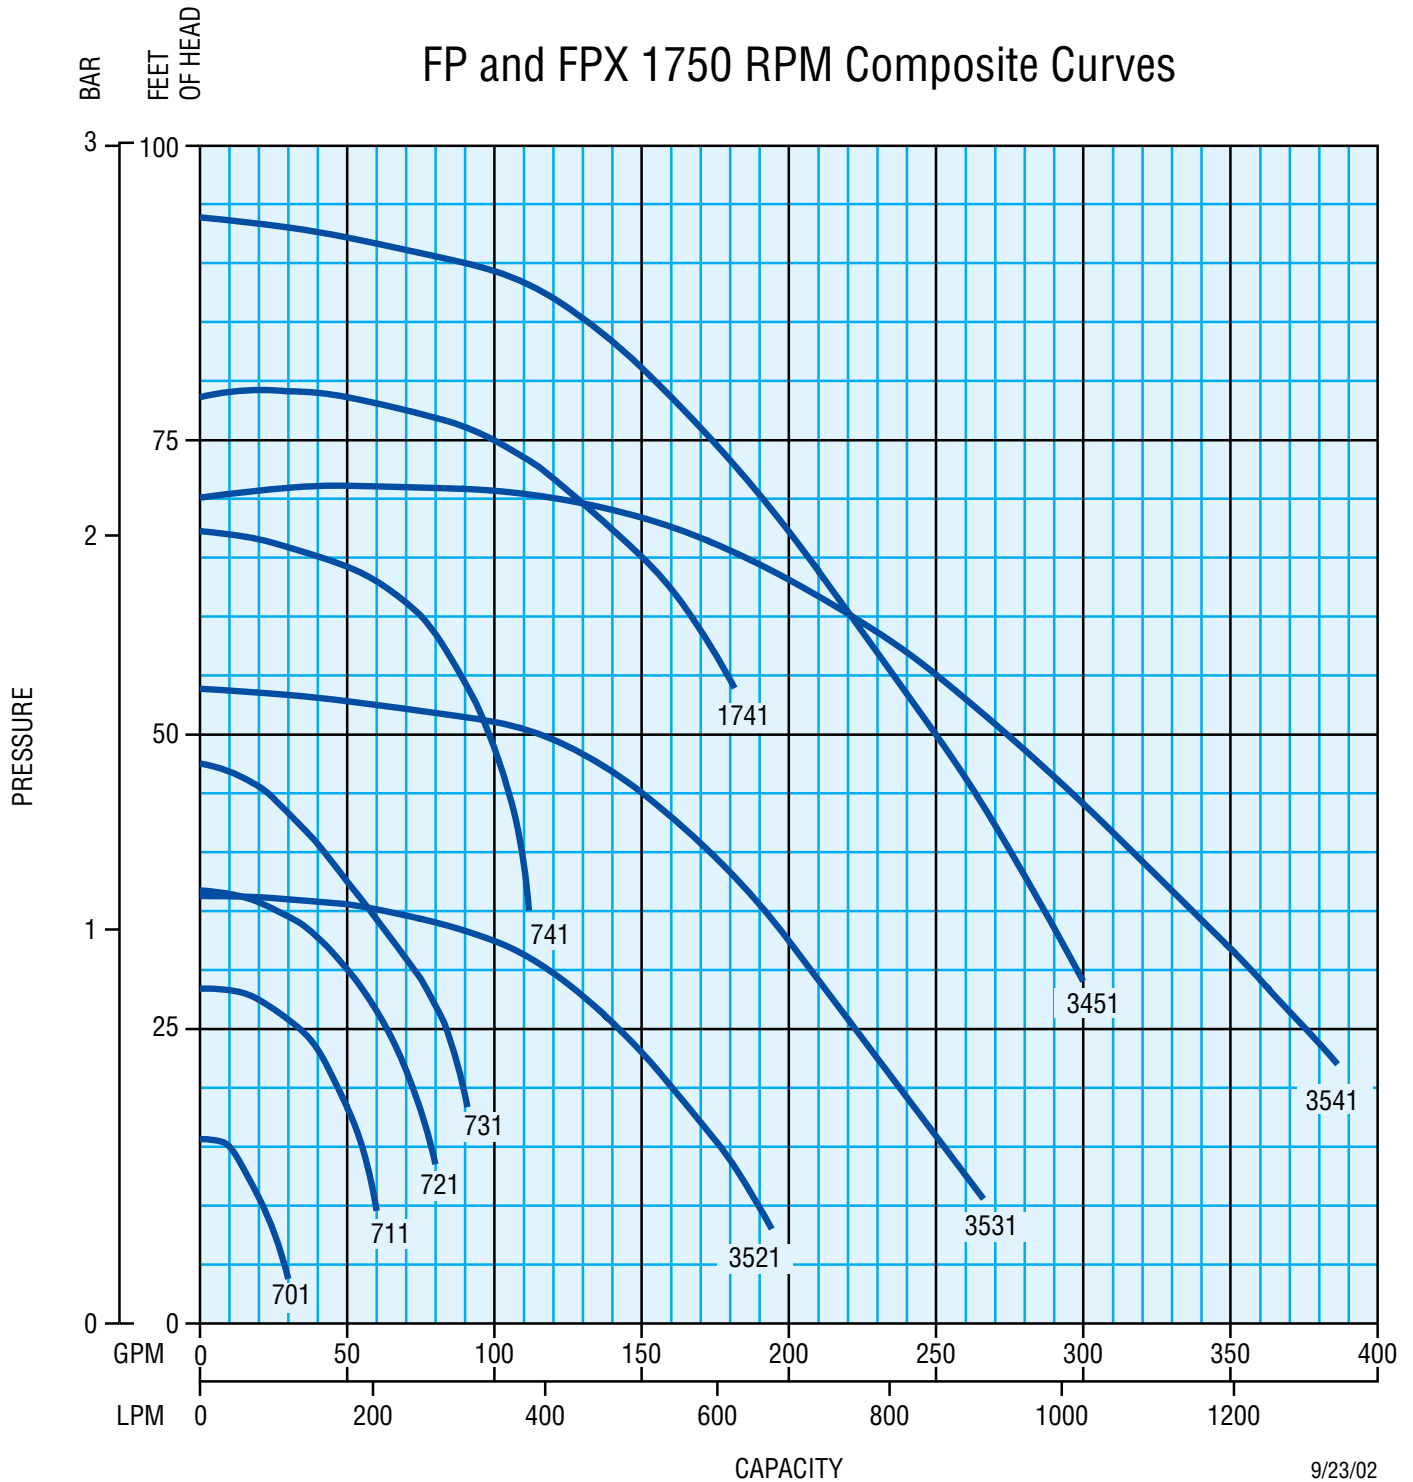




FP/FPX Composite Performance Curve: Models 3551-1161

1750 RPM (60 Hz)

Performance curve based on tests using 70°F water. A tolerance of $\pm 5\%$ applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

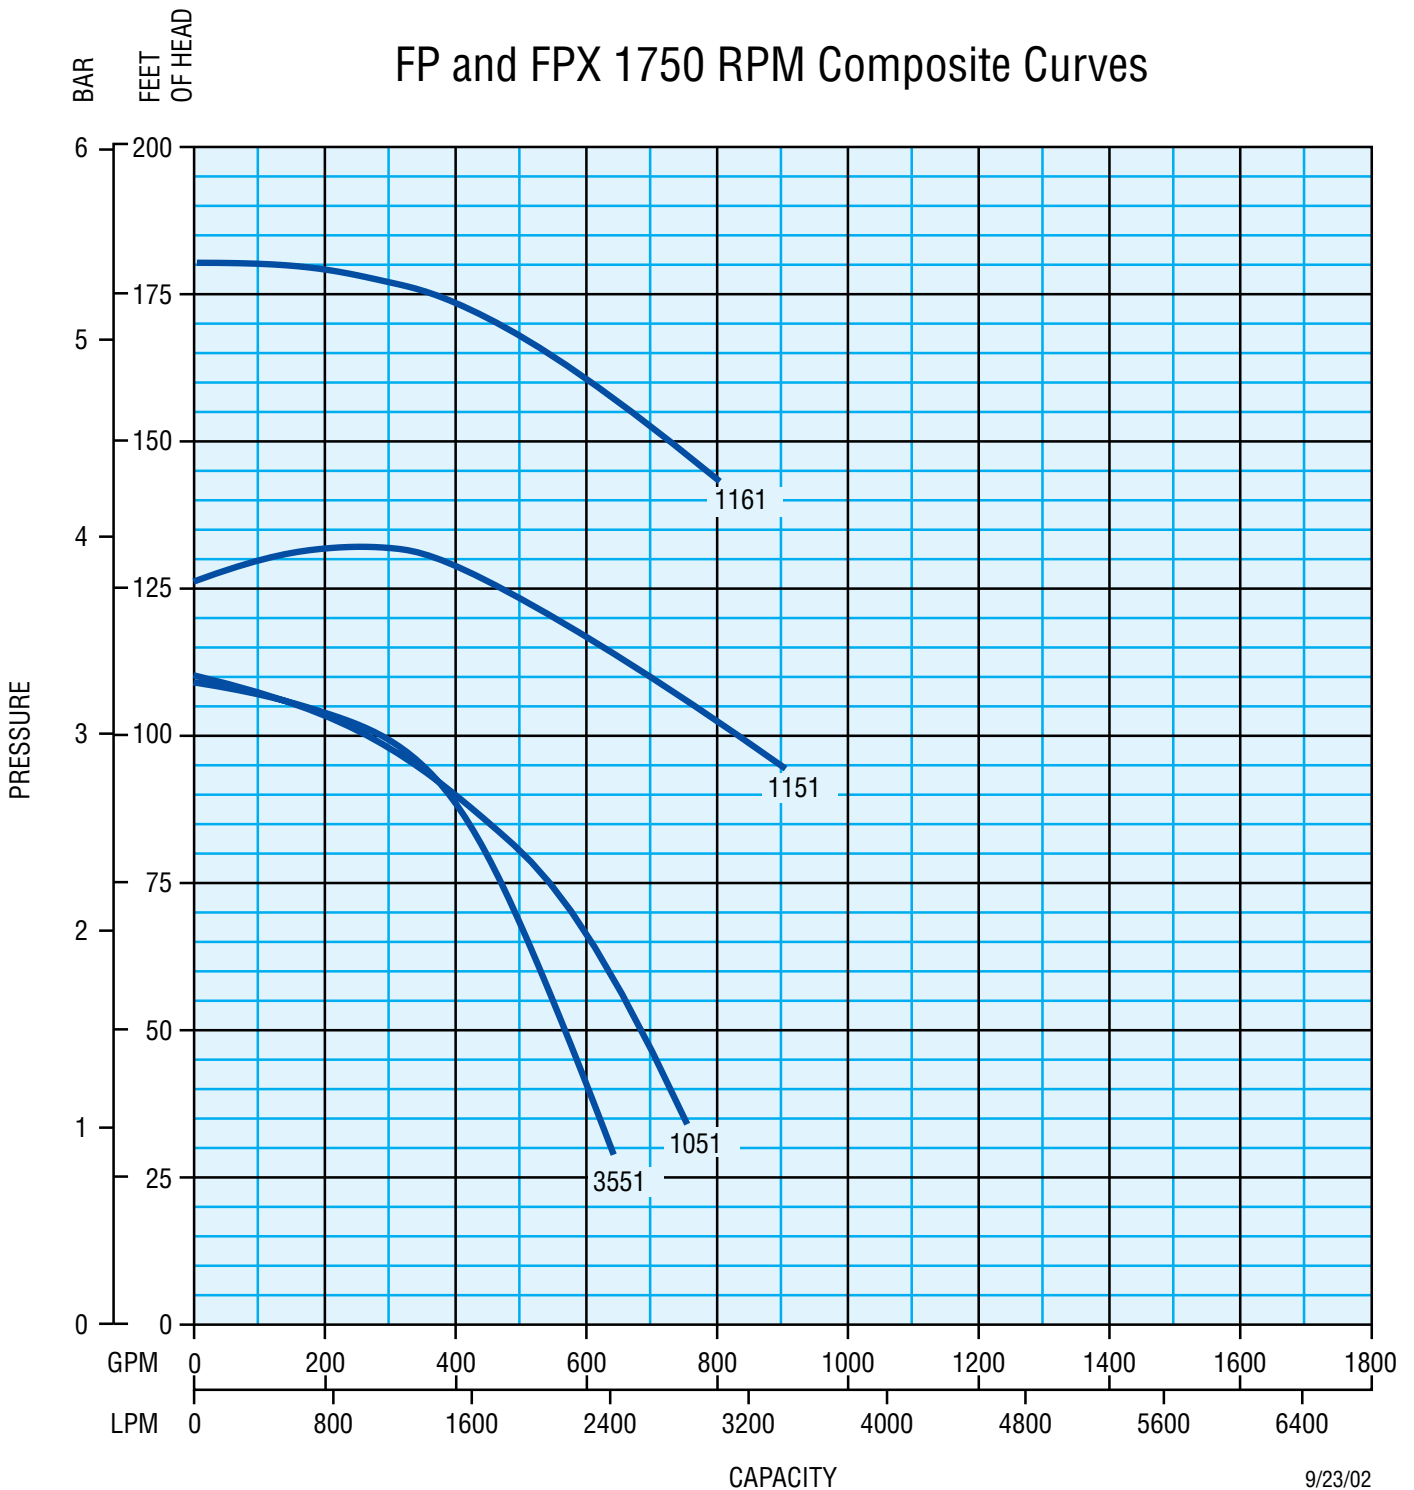



FP/FPX Composite Performance Curve

3500 RPM (60 Hz)

Performance curve based on tests using 70°F water. A tolerance of ± 5% applies to all figures. Actual performance may vary by application product. Please contact Fristam for different conditions.

